

GP18000EFI

GP SERIES Commercial/Residential Portable Generators

Features

- **COsense® Technology** – STOPS, ALERTS, SAVES. Powerful protection from hazardous carbon monoxide.
- **Generac 816cc EFI engine** delivers the right amount of power to get the best performance and efficiency out of your engine.
- **True Power™ Technology** with less than <5% THD to safely power sensitive electronic equipment in your home.
- **Low-oil pressure shutdown** automatically safeguards engine from damage.
- **Large-capacity fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Hardened 1 1/4" steel tube cradle** for added strength and durability.
- **Hour Meter** tracks maintenance intervals.
- **Heavy-duty, never-flat wheels** for reliable portability.
- **Electric Start**, battery included, provides hassle-free start-up.


Model 7706-0 UPC: 696471083101
(EPA/49-State)

Model 8917-0 UPC: 696471101324
(50-State)



AC Rated Output Running Watts 18000
AC Maximum Output Starting Watts 22500

Control Panel

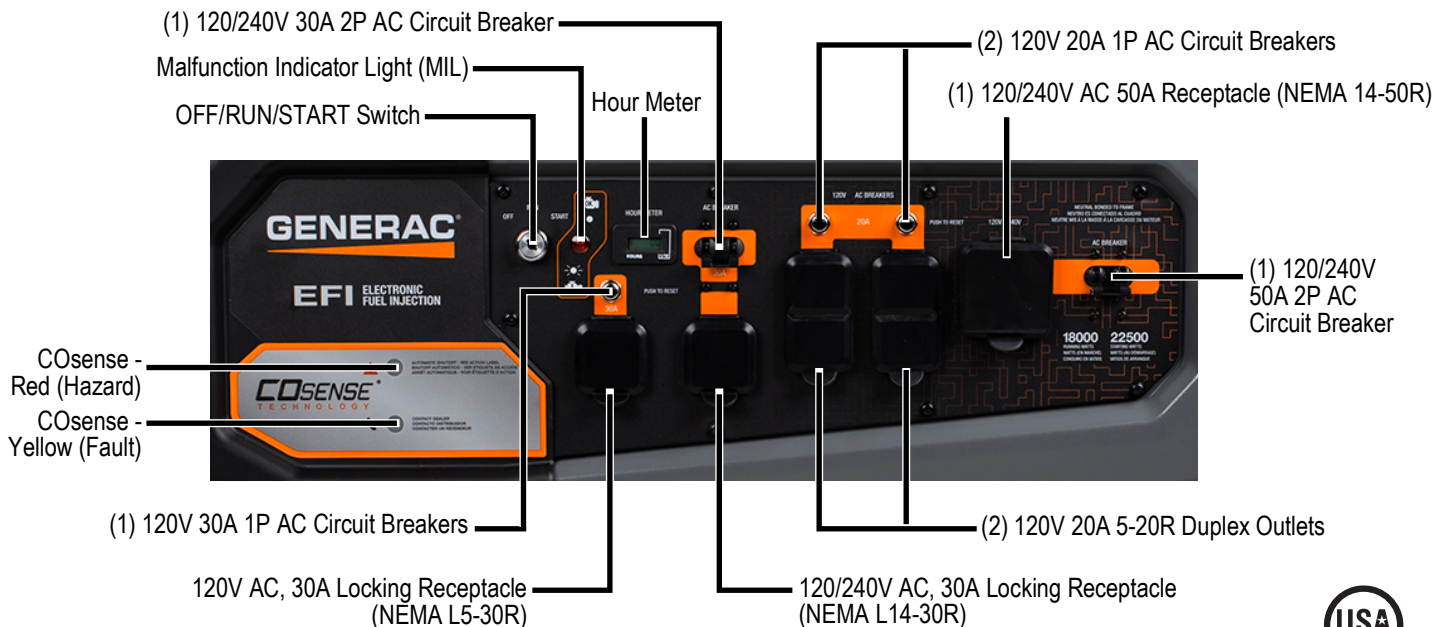

*Assembled in the USA using domestic and foreign parts

GP18000EFI

Specifications

| | |
|--|--|
| Product Series | GP18000EFI |
| Model (Configuration) | 7706-0 (EPA/49-State) / 8917-0 (50-State) |
| AC Rated Output Running Watts | 18000 |
| AC Maximum Output Motor Starting Watts | 22500 |
| Rated AC Voltage | 120/240 VAC |
| Rated AC Frequency | 60 Hz |
| Rated VAC Amperage | 75 /150 |
| Engine Displacement | 816cc |
| Engine Type | OHVI |
| Engine RPM | 3600 |
| Recommended Oil | 10W-30 / SAE30 |
| Oil Capacity qt (L) | w/ Filter Change: 2.2 (2.1) w/o Filter Change: 2.0 (1.95) |
| Lubrication Method | Oil Pump |
| Automatic Voltage Regulation (AVR) | Yes |
| Starting Method | Electric |
| Low Oil Shutdown Method | Low Pressure |
| Battery Included | Yes |

| | |
|------------------------------|---|
| Battery Type | Group U1 |
| Battery Part No. | N/A (Replacement batteries must be purchased locally) |
| Neutral Bonded to Ground | Yes - Neutral Bonded to Frame |
| Start Switch Type | Off/Run/Start Switch |
| Switch Location | On Control Panel |
| Fuel Gauge | Built-In Tank |
| Fuel Tank Capacity Gal (L) | 14.2 (54.0) |
| Run Time at 50% Load (Hours) | 9 |
| Handle Style | Folding, Locking |
| Wheel Type | 12" Never-flat Wheels |
| Warranty- Residential | 3 Year Limited |
| Warranty- Commercial | 2 Year Limited |

Dimensions and Weights

| | |
|--------------------------|---|
| Length in (mm) | 58.5 (1485) |
| Width in (mm) | 30.9 (785.5) |
| Height in (mm) | 36.5 (928.1) |
| Carton Length in (mm) | 40 (1016) |
| Carton Width in (mm) | 27 (685.8) |
| Carton Height in (mm) | 37.7 (958.2) |
| Unit Weight lbs (kg) | 439.2 (199.2) (EPA/49-State) / 442.8 (200.9) (50-State) |
| Shipping Weight lbs (kg) | 469.2 (212.8) (EPA/49-State) / 472.8 (214.5) (50-State) |

